





CATALOGO PROFILI

2023/24

SEZIONE VARIA

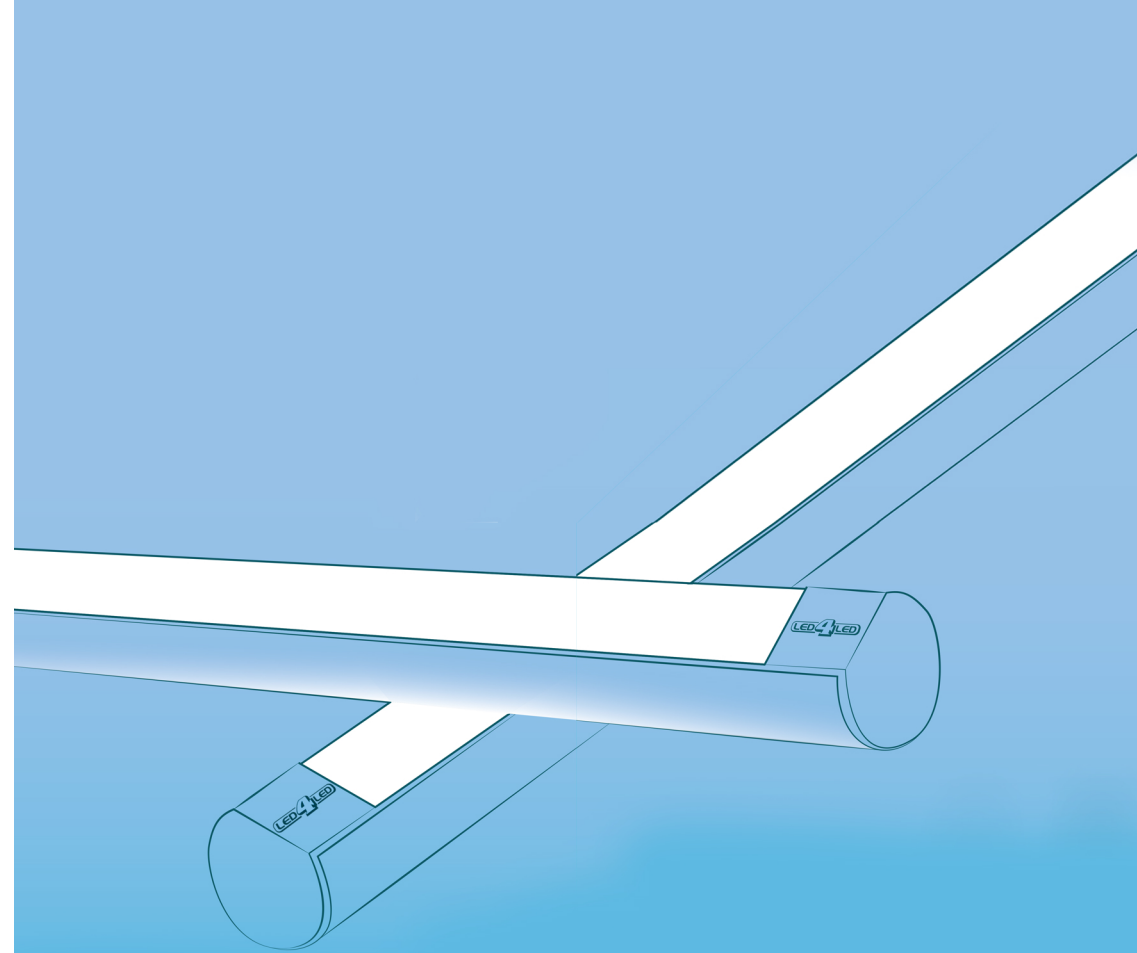


Profili Led Profiles




PROFILI 74LS

74LS30

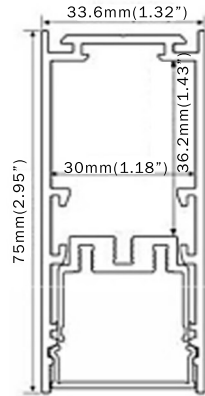


74LS30


Free combination

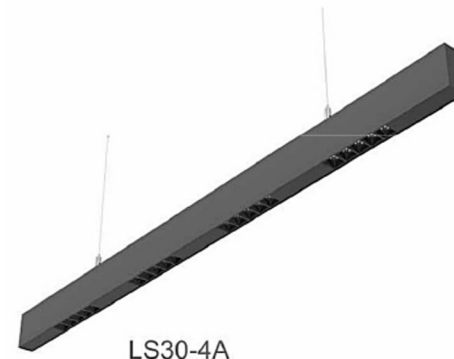


LS30-4A

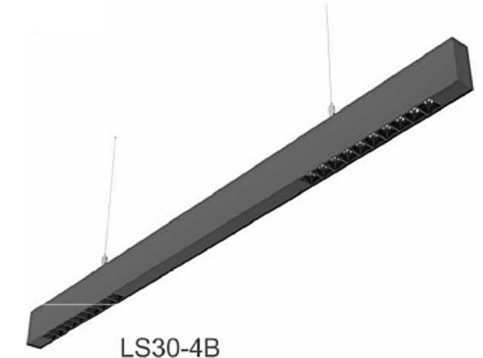





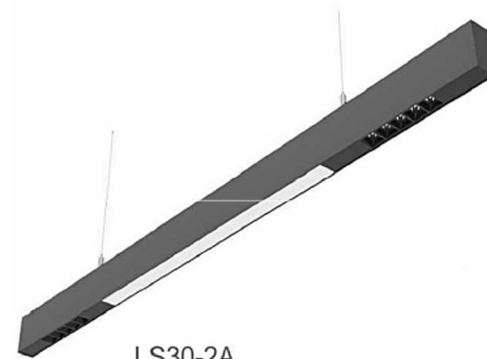



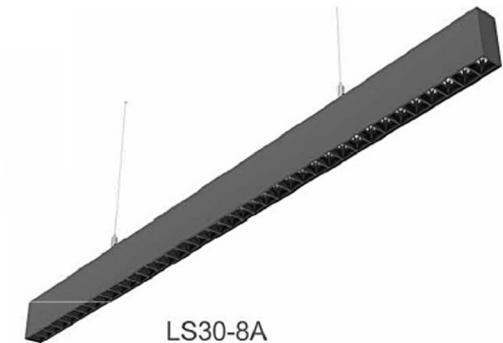


LS30-4B



LS30-2A



LS30-8A


	End caps		Blind cover		Reflector 15°, 30°, 45°
	Inside clip		LED module		90° connector
	Outside clip		Steel wire		180° connector
	PC frosted cover		Safety wire		

74LS30

Installation Methods




Step 01:
Install the end caps




Step 06:
Push the anti-glare cover
and blind cover inside



Step 02:
Fix the led module



Step 07:
Fix the external clip



Step 03:
Fix the reflector



Step 04:
Fix the internal clips
and the driver



Step 05:
Fix the gear tray
and the safety wire




Step 08:
Fix the steel wire


Step 09:
Installation completed

PROFILI 74LS


74LS50

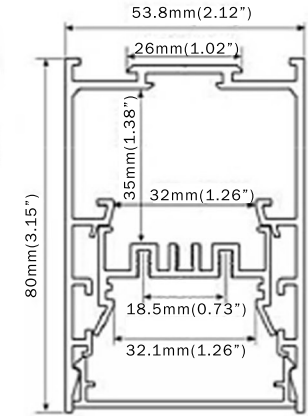


	CNC end caps without hole		Prismatic cover		Reflector 15°, 30°, 45°
	Inside clip		PC frosted cover		Wall washer
	Outside clip		Blind cover		High reflective louver
	Led module		Steel wire		Safety wire
	90° Connector		180° Connector		Internal clip
	Prismatic 3 in 1		Prismatic+lens		

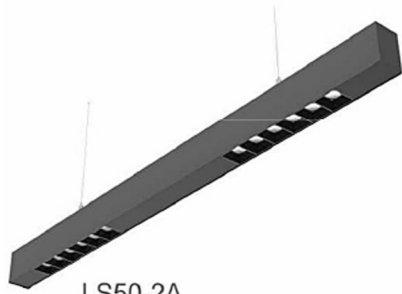


LS50-2A

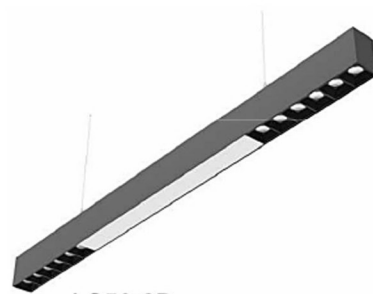


LS50-2B

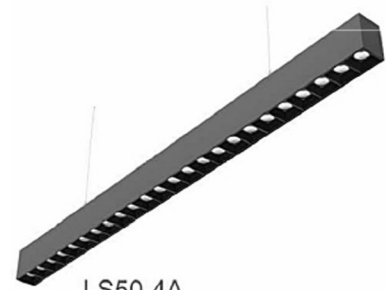


LS50-4A

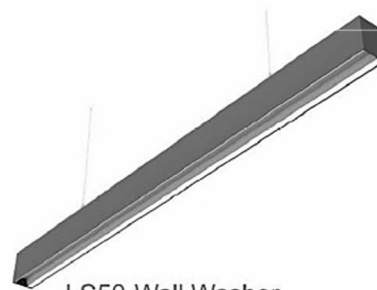

LS50-Wall Washer

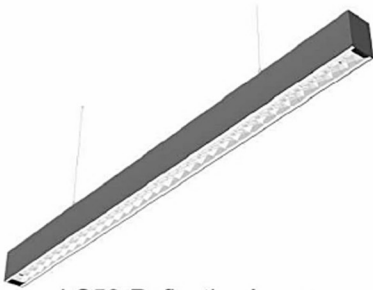


LS50-Reflective Louver

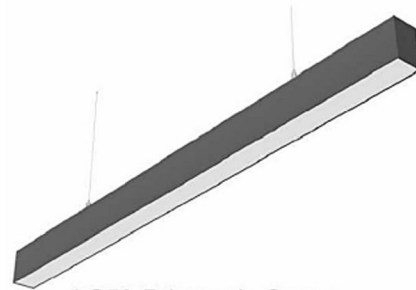


LS50-Prismatic Cover


Installation with reflector

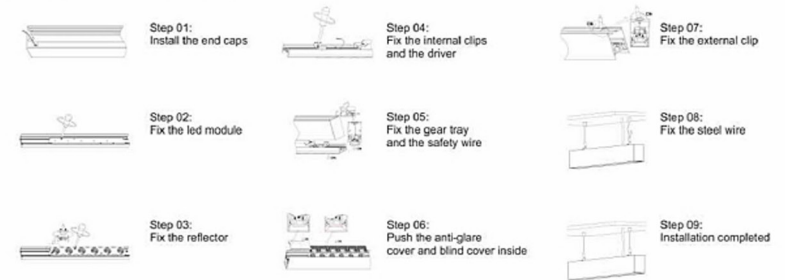

Installation with reflective louver

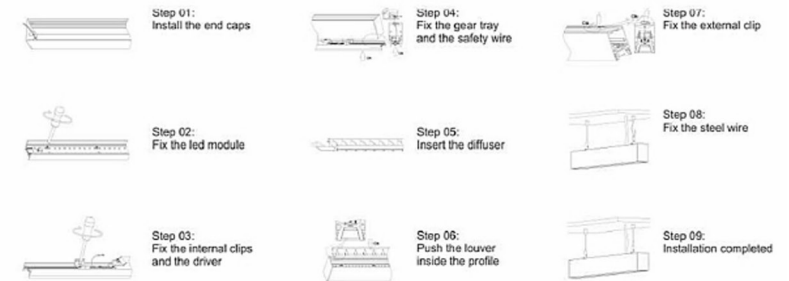


Installation with wall washer

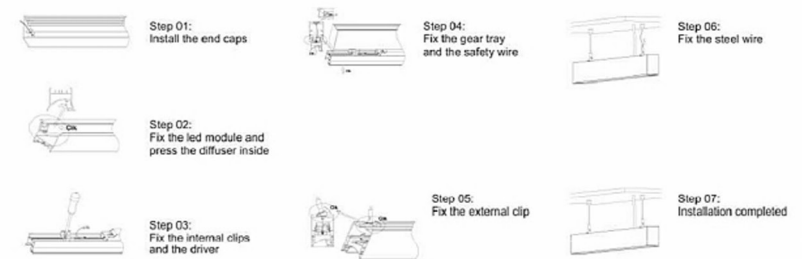


PROFILI 74LS

74LS30-T

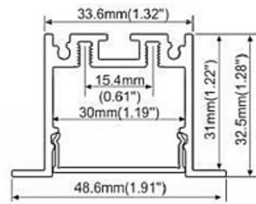

PROFILI 74LS

74LS30-TS

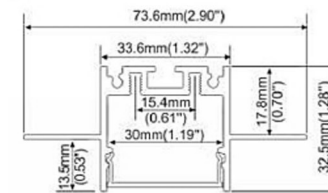

End caps



Blind cover



PC frosted cover



Reflector: 15°, 30°, 45°



Spring clip



End caps



Blind cover



PC frosted cover





Reflector: 15°, 30°, 45°

PROFILI 74ALP

74ALP25C-R

74ALP25C-R

Installation Methods

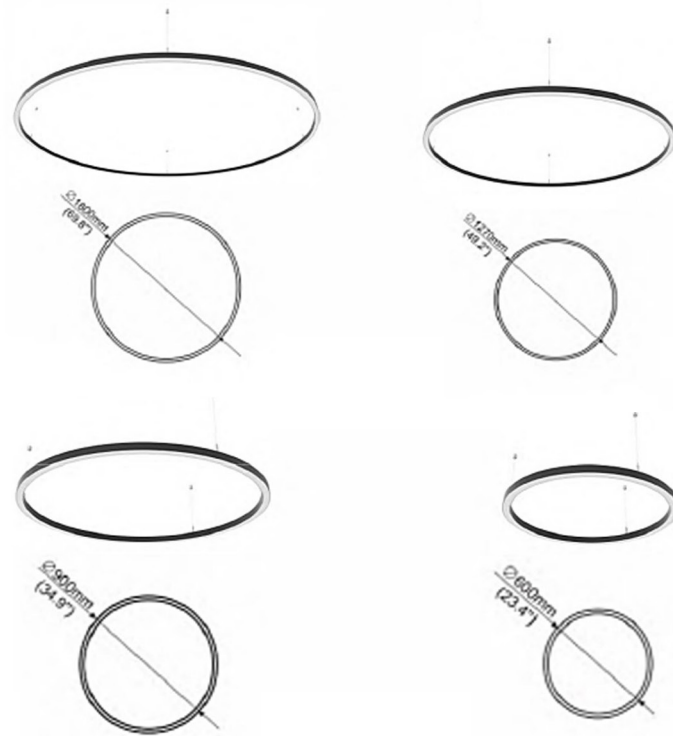

• PMMA opal matte cover




Step 01:
Connecting the curved profile by connector




Step 02:
Stick the led board inside the profile



Step 03:
Press the curved cover into the profile



Step 04:
Move the slider to suitable position



Step 05:
Lock the slider



Step 06:
Hang the circle by the steel wire



Step 07:
Connecting the driver

PROFILI 74ALP

74ALP25C-R




Connector



Steel wire







Curve led board 600 mm

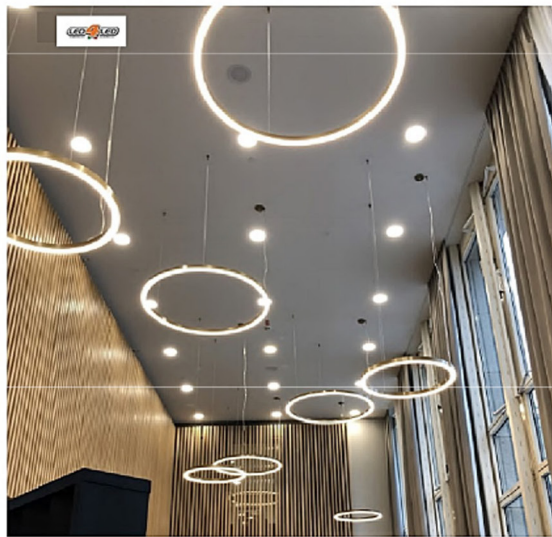

PROFILI 74ALP

74ALP50C

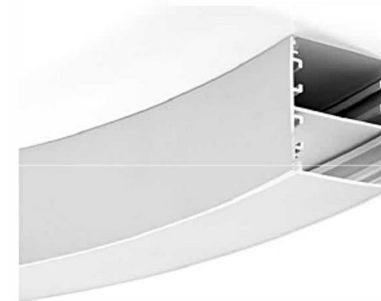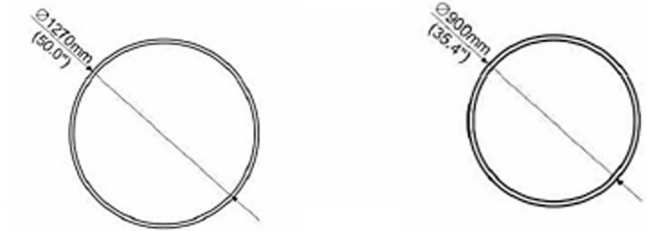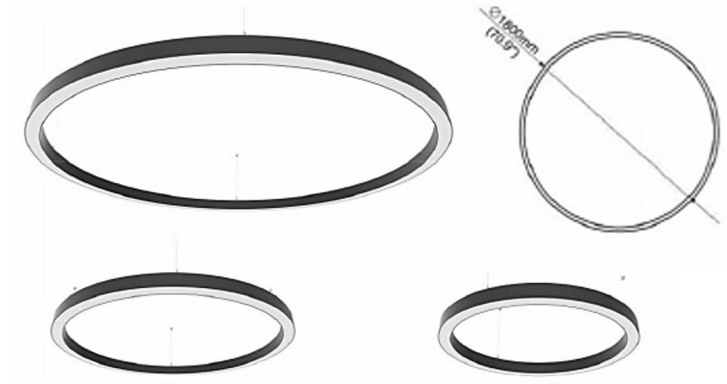

• PMMA opal matte cover



Hanging clip



Curved led board



Connector



Steel wire



STUDIO 4M LUX S.R.L.S.

SEDE LEGALE/MAGAZZINO

Via Boschet 1/D

31010 Farra di Soligo

Tel: +39 0438 903313

Cell: +39 3479116273

Email: info@led4led.com

www.led4led.com

